

## SLUDGE FINDER 2

Reliable & continuous sludge blanket level measurement.

### Two-Part System Purposely Designed for Sludge Blanket Level Measurement

The Sludge Finder 2 is a versatile, accurate, and reliable solution to the problem of accurately measuring interface levels in primary or secondary settlement tanks and Sequencing Batch Reactors (SBR) systems. Operating ultrasonically through liquid, Sludge Finder 2 uses proven echo processing algorithms to identify the sludge interface level using state of the art digital echo processing technique found only in this unit.

The unique viper transducer is immersed in the liquid, emitting a high frequency ultrasonic pulse down towards the sludge interface. The pulse reflects from the interface of the denser material back to the Viper transducer face. This echo is analyzed by the controller unit providing a depth reading and an analog output proportional to the height of the interface above the vessel bottom.

### Multiple Tanks and Multiple Applications

Sludge Finder 2 will operate with one or two transducers, you can mix and match Sludge Transducers and Pulsar Measurement's main dB Transducer range to give astonishing versatility. Manage two clarifier's/thickeners, or one clarifier plus an ultrasonic level application from a sludge unit,



### THE RIGHT METER FOR

- Primary & Secondary Settlement Tanks
- DAF Thickeners
- Gravity Thickeners
- Stationary & Traveling Bridges

providing flexible, economical control and a sludge connection point for system interface.

Sludge Finder 2 features a microprocessor and a multifunction display showing blanket level, complete echo profile, alarm points, tank depth and multiple tank status.

## Output Options

Sludge Finder 2 features 4-20mA isolated outputs for each channel, with optional RS485 connection (Modbus or Profibus). Six control relays are included (5A rated), assignable to any channel. An optional Radio Telemetry System may be fitted with a 500 m (1,640 ft) line of sight range. Up to 48 Nodes can be used using a 'Multihop' receiver installation.

## The Hygienic Solution

Remote measurement with Sludge Finder 2 means you can put an end to tedious, time consuming, potentially unhygienic and hazardous manual measurements using gap switches or vacuum probes.

## Self-Cleaning Transducer

Sludge Finder 2 is designed to be maintenance free. Sludge Finder's Viper transducer is a single beam ultrasonic unit immersed just below the liquid surface. A wiper blade sweeps the transducer face, ensuring that it remains clean. The Viper transducer may be positioned up to 200 m (656 ft) from the control unit and has a measurement range of 0.3 m to 10 m (0.98 ft to 32 ft). Accuracy is 0.25% of the measured range. A tight 6 degree beam angle and sophisticated echo processing algorithms makes sure that Sludge Finder 2 deals with difficult tanks and rotating equipment with ease.



Sludge settlement tanks at a Sewage Treatment Works.



Viper transducer doing it's job!

## Easy Installation & Set Up

Sludge Finder 2 is simply installed and the transducer cable can be easily extended with twin pair screened cable. To program Sludge Finder 2, the operator enters operating parameters via a menu driven operator interface and the Sludge Finder 2 automatically tracks to the blanket interface. Sludge Finder 2's operator interface consists of several screens that make setting up the unit straightforward and communicates information about the process quickly, clearly and concisely.

Sludge Finder 2 allows a user to set up two interface points to display, and to control the process via the echo profile returned from a single self-cleaning Viper transducer. One of the primary benefits is the ability to monitor sludge interface levels of differing densities.

The new feature could reveal a high level of flocculant spilling into the local water course, potentially causing pollution and a breach of consent at the same time as measuring and controlling the Return Activated Sludge (RAS) layer in the normal way.

The unit can output two isolated 4-20mA signals, one for each interface.

# Technical Specifications

## PHYSICAL

<b>Controller Body Dimensions:</b>	235 mm x 184 mm x 120 mm (9.25 in x 7.24 in x 4.72 in) Wall mount only.
<b>Weight:</b>	Nominal 1 kg (2.2 lb)
<b>Enclosure Material/Description:</b>	Polycarbonate, flame resistant to UL94-5V
<b>Cable Entry Detail:</b>	10 cable entry knock outs, 5 x M20 and 1 x M16 underside. 4 x PG11 at rear
<b>Transducer Cable Extensions:</b>	2 twisted pair 0.5 mm <sup>2</sup> with overall screen
<b>Maximum Separation:</b>	200 m (656 ft)

## ENVIRONMENTAL

<b>IP Rating:</b>	IP65/NEMA 4X
<b>Max. &amp; Min. Temperature (Electronics):</b>	-20 °C to +50 °C (-4 °F to +122 °F)
<b>Flammable Atmosphere Approval:</b>	Safe area compatible with approved sensors/transducers. See sensor/transducer spec sheet
<b>CE Approval:</b>	2014/30/EU & 2014/35/EU — EMC Directive. Standards applied: EN 61010-1:2010 / EN 61326-1:2013 / EN 55011 / EN 61000 (3-2 / 3-3 / 4-2 / 4-3 / 4-4 / 4-5 / 4-6 / 4-7 / 4-11)
<b>ATEX Approval:</b>	Controller must be within a safe area. See dB transducers for level sensor approvals

## OUTPUTS


<b>Analog Output:</b>	2 off isolated (to 150 V floating) output of 4-20mA or 0-20mA into 1 kΩ (user programmable and adjustable) 0.1% resolution
<b>Digital Output:</b>	Half duplex RS232
<b>Volt Free Contacts, Number and Rating :</b>	6 form "C" (SPDT) rated at 5 A at 115 V AC
<b>Display:</b>	192 x 128 pixel illuminated graphical display showing a variety of screens including echo profile. Fully programmable display options, integral keypad with menu navigation keys.
<b>Radio Modem (Optional):</b>	4-20mA using wireless exempt frequencies. Maximum range 500 m (1,640 ft) line-of-sight
<b>Communication Bus (Optional):</b>	RS485 Modbus RTU/ASCII or Profibus DPV0 or DPV1 (slave device)

## PROGRAMMING


<b>On-board Programming:</b>	By integral keypad
<b>PC Programming:</b>	Via RS232
<b>Programming Security:</b>	Via passcode (user selectable and adjustable)
<b>Programmed Data Integrity:</b>	Via non-volatile memory
<b>PC Software:</b>	Sludge Finder PC within PC Software Suite — compatible with XP (service pack 3), Windows 7/8/10

## SUPPLY

<b>Operating Voltage:</b>	Universal 100-240 V AC 50/60 Hz, 22-28 V DC
<b>Power Consumption:</b>	20 W maximum power (typically 11 W)
<b>Fuse:</b>	2 A slow blow

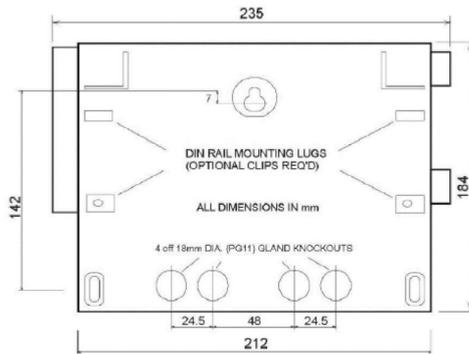

Sludge Finder 2 Drawing Back

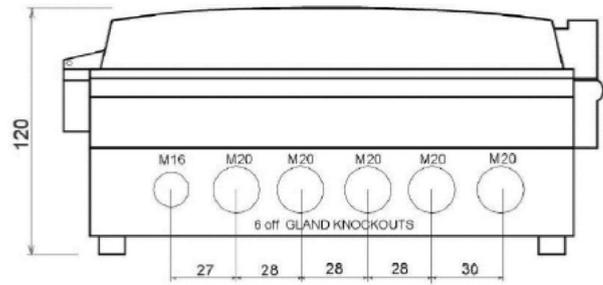

Sludge Finder 2 Cable Entry Drawing

## Delivering the Measure of Possibility

Pulsar Measurement offers worldwide professional support for all of our products, and our network of reps and distributors all offer full support and training. Our facilities in Malvern, UK and Largo, USA are home to technical support teams who are always available to answer your call or attend your site when required. Our global presence, with direct offices in the UK, USA, Canada, and Malaysia allow us to create close relationships with our customers and provide service, support, training, and information throughout the lifetime of your product.

By taking a step forward in echo processing technology, Pulsar Measurement addresses applications previously thought to be beyond the scope of ultrasonic measurement. This technology improves signal processing at the transducer head which has made it possible to increase resistance to electrical noise, enabling the transducer to 'zone in' on the true echo.

For more information, please visit our website:

[www.pulsarmeasurement.com](http://www.pulsarmeasurement.com)



INFO@PULSARMEASUREMENT.COM

*Pulsar Measurement is a trading name of Pulsar Process Measurement, Ltd.*

*Copyright © 2020 Pulsar Measurement  
Registered Address: 1 Chamberlain Square CS, Birmingham B3 3AX  
Registered No.: 3345604 England & Wales*

**United States**  
11451 Belcher Road South  
Largo, FL 33773  
888-473-9546

**Canada**  
16456 Sixsmith Drive  
Long Sault, Ont. K0C 1P0  
855-300-9151

**United Kingdom**  
Cardinal Building, Enigma  
Commercial Centre  
Sandy's Road, Malvern WR14 1JJ  
+44 (0) 1684 891371

Rev 1.0