

VIPER TRANSDUCER

Technical Specifications:

The Viper sludge transducer can be positioned up to 200 m (656 ft) from the controller and has a measurement range of 0.3 m to 10 m (0.98 ft to 32.8 ft) — accuracy is 0.25% of the measured range. A tight 6° beam angle makes confined or cluttered applications easy and the self-cleaning face removes the need for regular inspection and maintenance — meaning you can avoid that unhygienic and hazardous task you hate!



PHYSICAL

Sensor Body Dimensions: 78 mm D x 195 mm H (3.07 in x 7.67 in)

Weight: Nominal 1.5 kg (3.3 lb)

Enclosure Material/Description: Valox 357. Wiper blade — Stainless steel

Transducer Cable Extensions: 4-core screened

Maximum Separation: 200 m (656 ft)

ENVIRONMENTAL

IP Rating: IP68

Max. & Min. Temperature (Electronics): -20 °C to +50 °C (-4 °F to +122 °F)

CE Approval: 2014/30/EU & 2014/35/EU — EMC Directive. Standards applied: EN 61010-1:2010 / EN 61326-1:2013 / EN 55011 / EN 61000 (3-2 / 3-3 / 4-2 / 4-3 / 4-4 / 4-5 / 4-6 / 4-7 / 4-11)

ATEX Approval: Viper transducer must be within a safe area

PERFORMANCE


Accuracy: 0.25% of the measured range or 10 mm (0.39 in), whichever is greater

Resolution: 0.25% of the measured range or 10 mm (0.39 in), whichever is greater


Max Range: 10 m (32.8 ft)

Min Range: 0.3 m (0.98 ft)

Minimum Sludge Density: 0.5% concentration

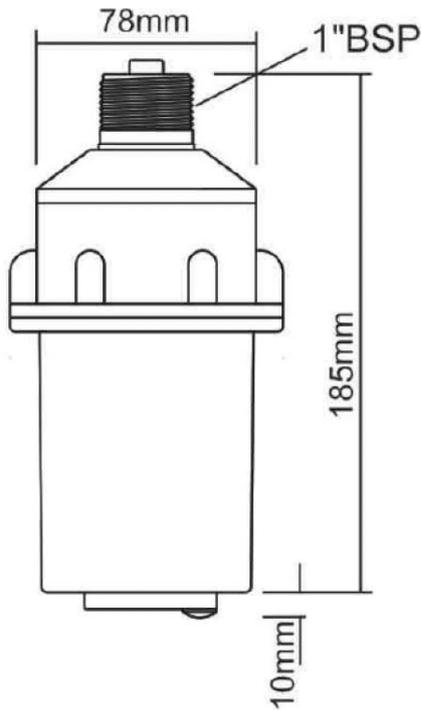

Viper Transducer Side Drawing

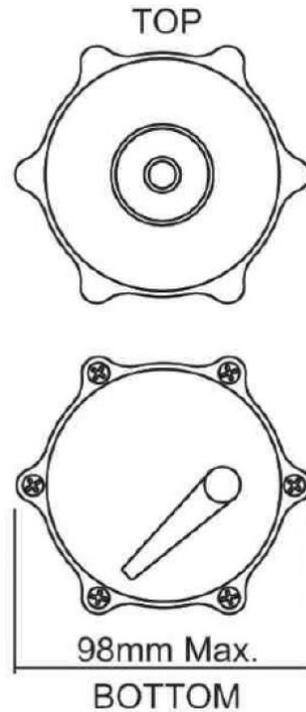

Viper Transducer Top and Bottom Drawing

Delivering the Measure of Possibility

Pulsar Measurement offers worldwide professional support for all of our products, and our network of reps and distributors all offer full support and training. Our facilities in Malvern, UK and Largo, USA are home to technical support teams who are always available to answer your call or attend your site when required. Our global presence, with direct offices in the UK, USA, Canada, and Malaysia allow us to create close relationships with our customers and provide service, support, training, and information throughout the lifetime of your product.

By taking a step forward in echo processing technology, Pulsar Measurement addresses applications previously thought to be beyond the scope of ultrasonic measurement. This technology improves signal processing at the transducer head which has made it possible to increase resistance to electrical noise, enabling the transducer to 'zone in' on the true echo.

For more information, please visit our website:

www.pulsarmeasurement.com



INFO@PULSARMEASUREMENT.COM

Pulsar Measurement is a trading name of Pulsar Process Measurement, Ltd.

*Copyright © 2020 Pulsar Measurement
Registered Address: 1 Chamberlain Square CS, Birmingham B3 3AX
Registered No.: 3345604 England & Wales*

United States
11451 Belcher Road South
Largo, FL 33773
888-473-9546

Canada
16456 Sixsmith Drive
Long Sault, Ont. K0C 1P0
855-300-9151

United Kingdom
Cardinal Building, Enigma
Commercial Centre
Sandy's Road, Malvern WR14 1JJ
+44 (0) 1684 891371

Rev 1.0